

FLUSH WALL PANELS


MATERIALS

.032 aluminum	24 gauge steel
.040 aluminum*	22 gauge steel*


SPECS

7", 11" or 12" O.C. 1" High


FLUSH PANEL

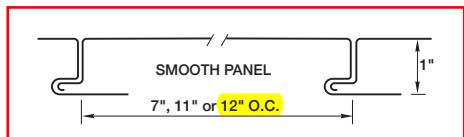



FLUSH PANEL



FLUSH PANEL W/ CLIP (OPTIONAL)



FLUSH PANEL W / CLIP (OPTIONAL)**



*Limited color availability. 12" O.C. has reduced fastening flange. A complete specification is available online at pac-clad.com.

**Clip is available only on 12" panels.

PRODUCT FEATURES

- Leveled for flatness
- Available with up to two pencil ribs
- Rounded interlock leg provides improved flush fit
- 30-year non-prorated finish warranty
- Panel lengths from 4' to 25'

MATERIAL

- 43 stocked colors (24 gauge steel)
- 16 Stocked colors (22 gauge steel)
- 36 stocked colors (.032 aluminum)
- 22 stocked colors (.040 aluminum)
- Galvalume Plus available

ASTM TESTS - FLUSH

- ASTM E330 tested - 12" only
- ASTM 1592
- ASTM E283
- ASTM E331
- AAMA 501.1-05

FLORIDA BUILDING PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Flush panels.

PRECISION SERIES WALL PANELS

MATERIALS

- .032 aluminum
- 24 gauge steel
- .040 aluminum
- 22 gauge steel**
- .050 aluminum

SPECS

12" or **16" Wide** 7/8" High



AVAILABLE WITH OR WITHOUT CLIP



PRODUCT FEATURES

- No-clip panel, or clip installation for expansion/contraction
- Panel depth of 7/8"
- Cost-effective installation
- Horizontal or vertical installation
- Panel lengths:
30' maximum for steel;
22' maximum for aluminum on the
thru-fastened leg; longer lengths
available on clip panels

MATERIAL

- 43 stocked colors (24 gauge steel)
- 36 stocked colors (.032 aluminum)
- 16 Stocked colors (22 gauge steel)
- 22 stocked colors (.040 aluminum)
- 29 stocked colors (.050 aluminum)
- Galvalume Plus available

TESTS

- ASTM E330
- ASTM E283
- ASTM E331
- ASTM 1592

FLORIDA BUILDING PRODUCT APPROVALS

Please refer to pac-clad.com or your local factory for specific product approval numbers for Precision Series panels.

Note: Line drawings may not be to scale.



PAC-CLAD®

P E T E R S E N

A **CARLISLE** COMPANY



FOREST GREEN



HARTFORD GREEN



▲ MILITARY BLUE




BERKSHIRE BLUE



▲ PACIFIC BLUE
(FKA Slate Blue)



AWARD BLUE



▲ AGED BRONZE



▲ MEDIUM BRONZE




▲ CARDINAL RED




▲ COLONIAL RED




▲ SANDSTONE



▲ ALMOND



▲ STONE WHITE



▲ BONE WHITE

Flush Metal Panel

HWP Metal Panel

Color Guide

PAC-CLAD.COM



 **daltile®**
IMAGINE WHAT'S POSSIBLE™

Ageless and Innovative – the Dignitary™ Series

The imaginative Dignitary Series provides depth on surfaces as it replicates French limestone embedded with fossil layers and natural veins. Beautiful in any setting, this outstanding ColorBody™ porcelain tile is equally suited to traditional or contemporary styles, bringing ageless dimension to every application. An array of colors in matte finish are available in three large-format sizes and a coordinating mosaic. Polished and textured finishes, as well as a 2 cm thickness, are also available in select sizes.

• REIMAGINING A CLASSIC

- Small fossils and veining replicate the look of French limestone that has stood the test of time
- Six rich neutral colors appeal to contemporary tastes
- 2 cm thick tile available in 24 x 24 size and three colors

• AGELESS BEAUTY ANYWHERE

- Three finishes offer the ability to stretch designs from floors to walls, indoors, and out
- Three large-format sizes plus an abstract mosaic all provide dimensional depth

STONE LOOK
USAGE
FLOOR
WALL
COUNTERTOP
SHOWER FLOOR
EXTERIOR FLOOR
STEPWISE™
TRU-EDGE™
MADE IN THE U.S.A.
LARGE FORMAT
MOSAIC/ DECO
ENCAUSTIC
TERRAZZO
PAVER
CUSTOMIZE
FLEXFIT™
PC COLORBODY PORCELAIN
LOW  HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

Cover photo features Dignitary™ Superior Taupe 24 x 48 on the floor, Superior Taupe 12 x 24 on the left wall, Luminary White 12 x 24 on the right wall, and Superior Taupe abstract mosaic on the shower wall. Above photo features Dignitary™ Superior Taupe 24 x 48 on the floor and Luminary White 12 x 24 on the wall.

SIZES:



FINISHES: MATTE | LIGHT POLISHED | TEXTURED

COLOR PALETTE



LUMINARY WHITE



NOTABLE BEIGE




EMINENCE GREY



SUPERIOR TAUPE



HERALD BROWN



GOVERNOR BLACK

FLOOR TILE – Available in Matte, Light Polished & Textured



LUMINARY WHITE DR07*



NOTABLE BEIGE DR09*



EMINENCE GREY DR10



SUPERIOR TAUPE DR08*




HERALD BROWN DR12



GOVERNOR BLACK DR11

ABSTRACT MOSAIC – Available in Matte only

LUMINARY
WHITE DR07*NOTABLE
BEIGE DR09*EMINENCE
GREY DR10SUPERIOR
TAUPE DR08*HERALD
BROWN DR12GOVERNOR
BLACK DR11* Available in 2 cm thickness
in 24 x 24 size

SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF

SCRATCH-RESISTANT[†][†]Applicable to products with Matte and Textured FinishesFIRE-RESISTANT[‡][‡]Not Applicable to Mesh-Mounted Mosaics

CLIMATEPRO™



SIMPLICLEAN™

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 ♦ Floor Tile	(23-3/8" x 47-1/16") (59.50 cm x 119.50 cm)	7/16"	15.50
	24 x 24 ■ Paver Tile	(23-7/16" x 23-7/16") (59.50 cm x 59.50 cm)	13/16" (2cm)	7.76
	24 x 24 ♦ Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.20
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.65 cm x 59.44 cm)	5/16"	15.12
	Abstract ♦ Mosaic (Mesh Mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	5/16"	3.88

♦ Available in Matte only

■ Available in 2cm thickness with textured surface in DR07, DR08 and DR09 colors only

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	✓***
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	✓**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

* Matte and Textured only

** Mosaic tile only

*** Textured and paver tile only



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



TRIM

Type	Number	Size	Pieces/ Carton
	P-43F9	3 x 24	10
	S-36C9T	6 x 12	20
	SC-36C9T	1 x 6	10

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).	 Random (V4)
Mosaic: 1/8"	

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs > 1000 lbs (2 cm)
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltile® products and information,
visit our website at daltile.com.



©2020 Daltile (6/20)