



106 BROADWAY
 EAGLE, CO
EROSION CONTROL PLAN

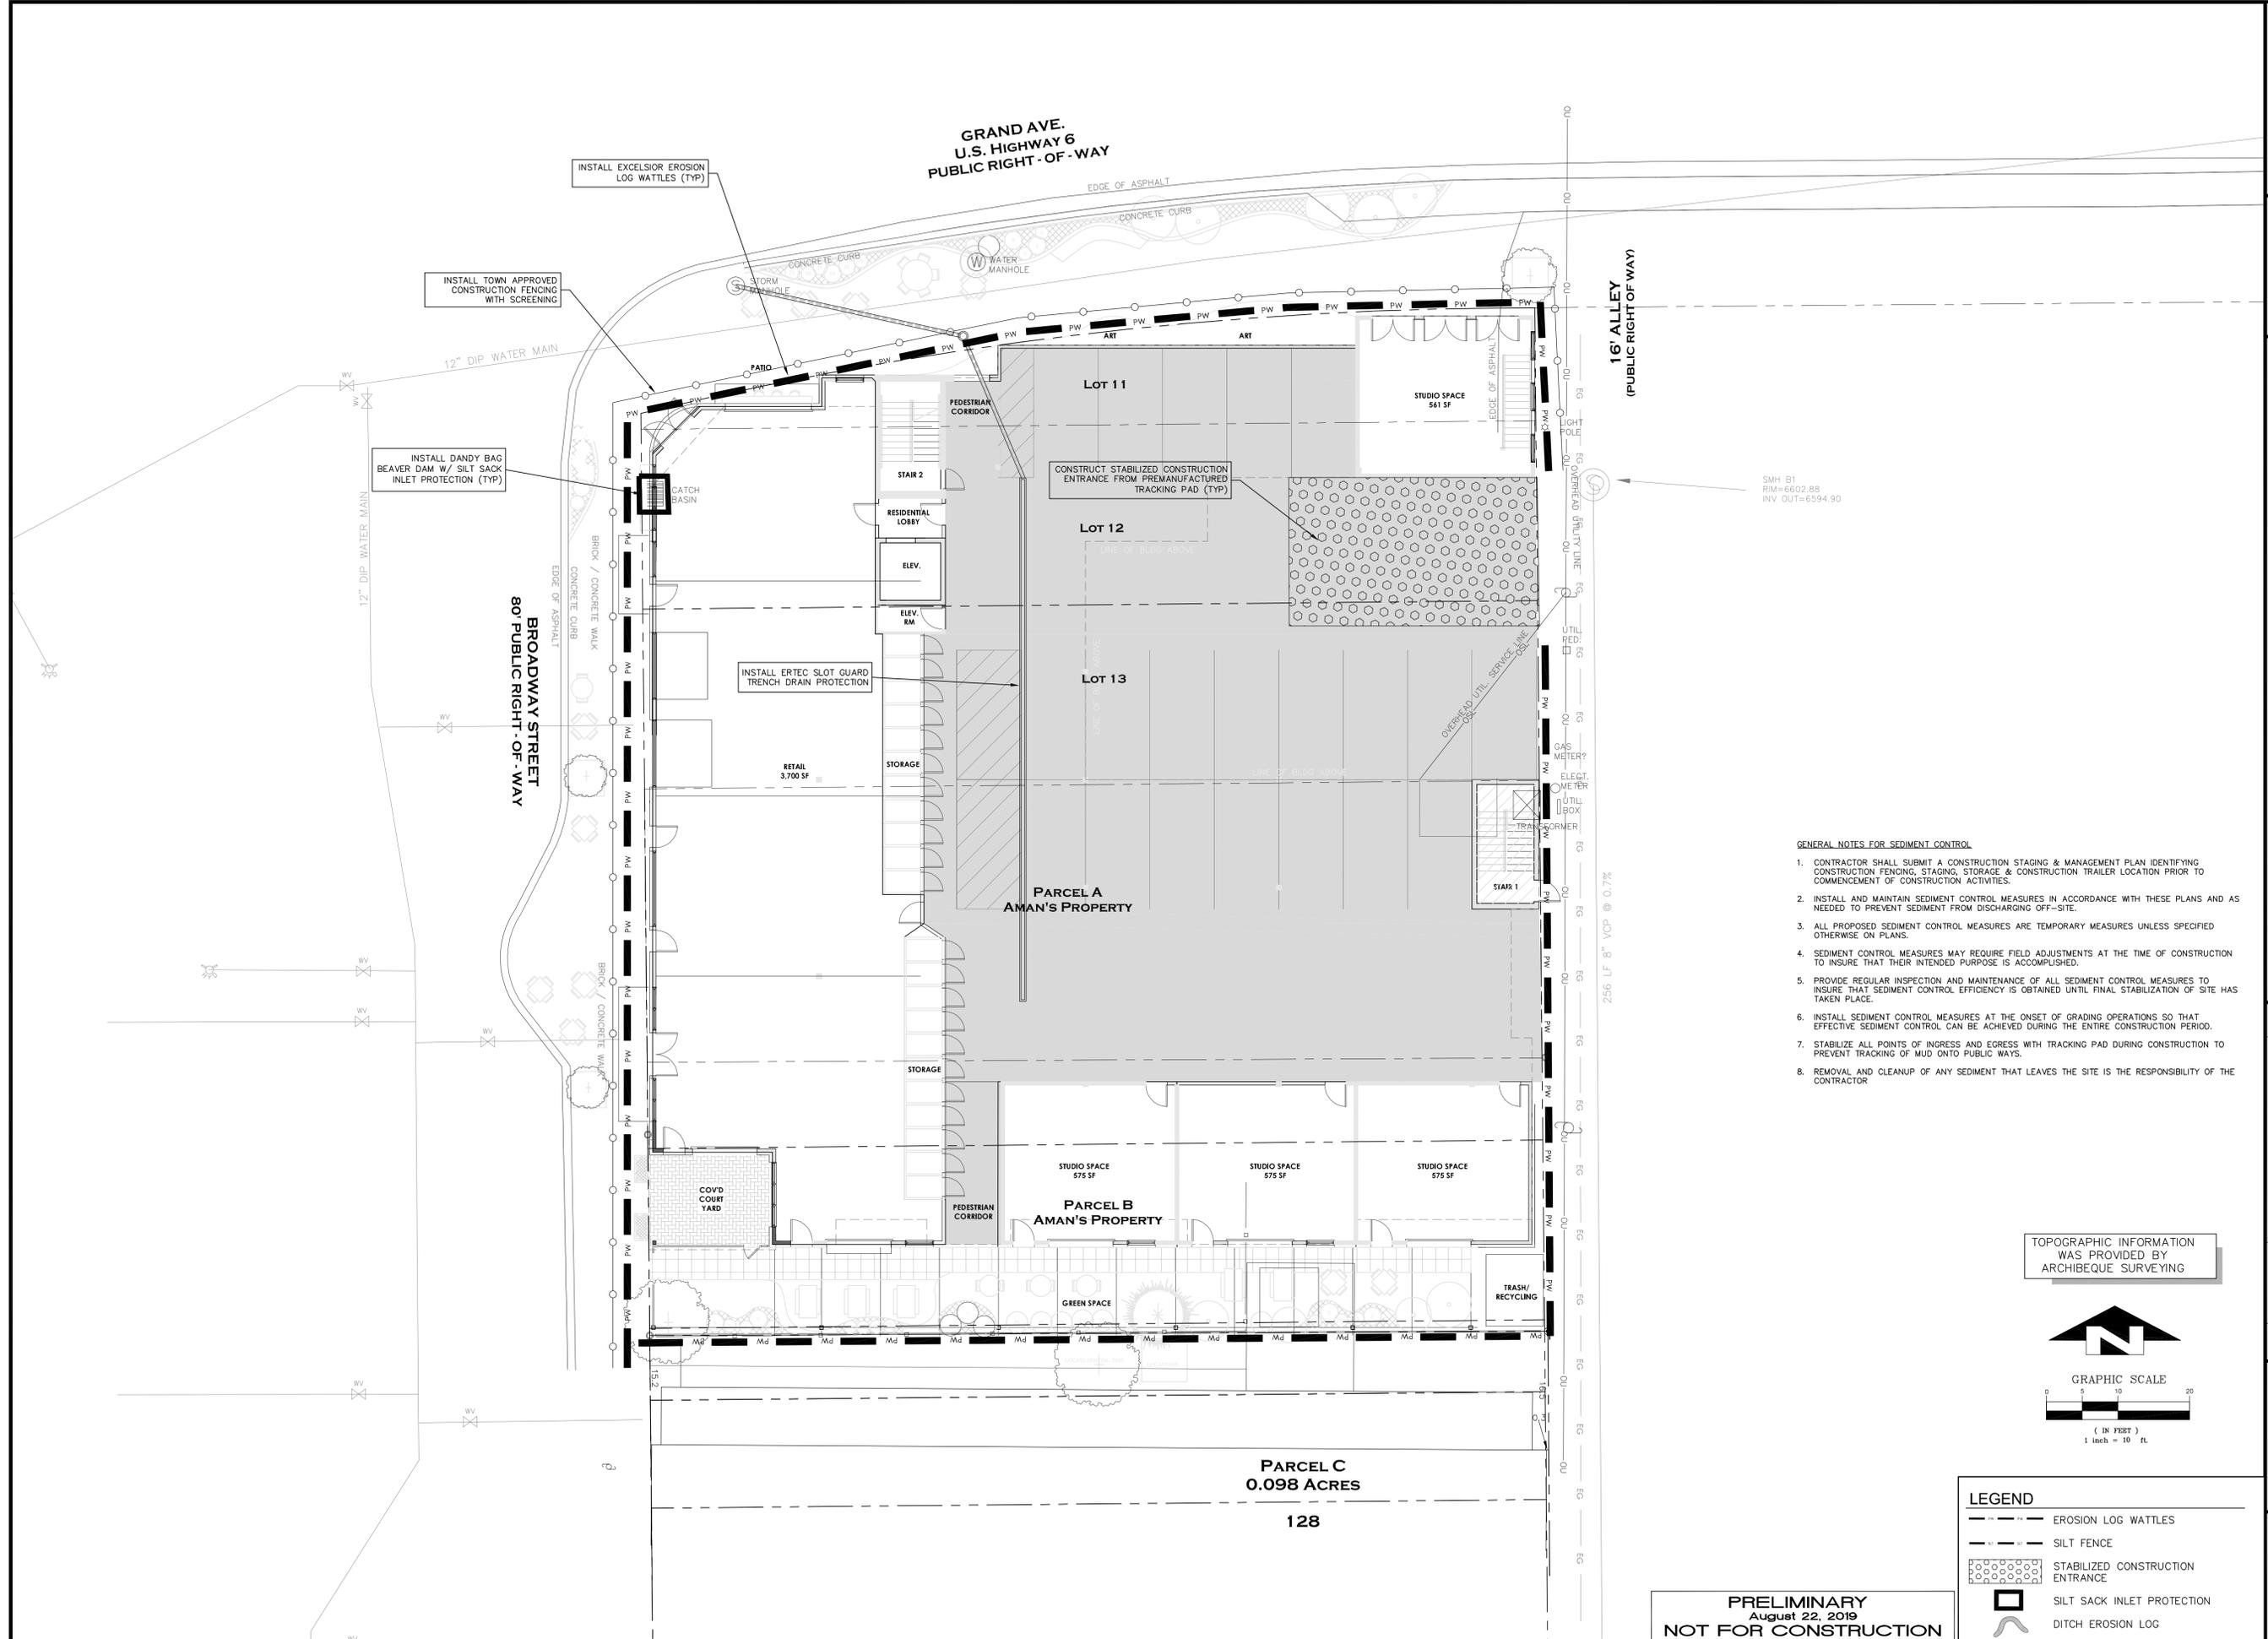

- GENERAL NOTES FOR SEDIMENT CONTROL**
1. CONTRACTOR SHALL SUBMIT A CONSTRUCTION STAGING & MANAGEMENT PLAN IDENTIFYING CONSTRUCTION FENCING, STAGING, STORAGE & CONSTRUCTION TRAILER LOCATION PRIOR TO COMMENCEMENT OF CONSTRUCTION ACTIVITIES.
 2. INSTALL AND MAINTAIN SEDIMENT CONTROL MEASURES IN ACCORDANCE WITH THESE PLANS AND AS NEEDED TO PREVENT SEDIMENT FROM DISCHARGING OFF-SITE.
 3. ALL PROPOSED SEDIMENT CONTROL MEASURES ARE TEMPORARY MEASURES UNLESS SPECIFIED OTHERWISE ON PLANS.
 4. SEDIMENT CONTROL MEASURES MAY REQUIRE FIELD ADJUSTMENTS AT THE TIME OF CONSTRUCTION TO INSURE THAT THEIR INTENDED PURPOSE IS ACCOMPLISHED.
 5. PROVIDE REGULAR INSPECTION AND MAINTENANCE OF ALL SEDIMENT CONTROL MEASURES TO INSURE THAT SEDIMENT CONTROL EFFICIENCY IS OBTAINED UNTIL FINAL STABILIZATION OF SITE HAS TAKEN PLACE.
 6. INSTALL SEDIMENT CONTROL MEASURES AT THE ONSET OF GRADING OPERATIONS SO THAT EFFECTIVE SEDIMENT CONTROL CAN BE ACHIEVED DURING THE ENTIRE CONSTRUCTION PERIOD.
 7. STABILIZE ALL POINTS OF INGRESS AND EGRESS WITH TRACKING PAD DURING CONSTRUCTION TO PREVENT TRACKING OF MUD ONTO PUBLIC WAYS.
 8. REMOVAL AND CLEANUP OF ANY SEDIMENT THAT LEAVES THE SITE IS THE RESPONSIBILITY OF THE CONTRACTOR

TOPOGRAPHIC INFORMATION
 WAS PROVIDED BY
 ARCHIBEQUE SURVEYING



LEGEND

- EROSION LOG WATTLES
- SILT FENCE
- STABILIZED CONSTRUCTION ENTRANCE
- SILT SACK INLET PROTECTION
- DITCH EROSION LOG













PRELIMINARY
 August 22, 2019
NOT FOR CONSTRUCTION

NO.	DATE	REVISIONS	BY
	08-23-19	MINOR DEVELOPMENT SUBMITTAL	MCW
DESIGN/XXX			
DRAWN XXX			
CHECKED XXX			
JOB NO. XXX			
DATE XX/XX/XXXX			

SHEET C4.0

C:\Eagle\106 Broadway - 2019\DWG\Master\Erosion-106.dwg, 8/22/2019 1:20:10 PM, wadley

DESIGNED	XXX	DATE	08-23-19
DRAWN	XXX	NO.	
CHECKED	XXX	REVISIONS	
JOB NO.	XXX	MINOR DEVELOPMENT	SUBMITTAL
DATE	XX/XX/XXXX	BY	MCW

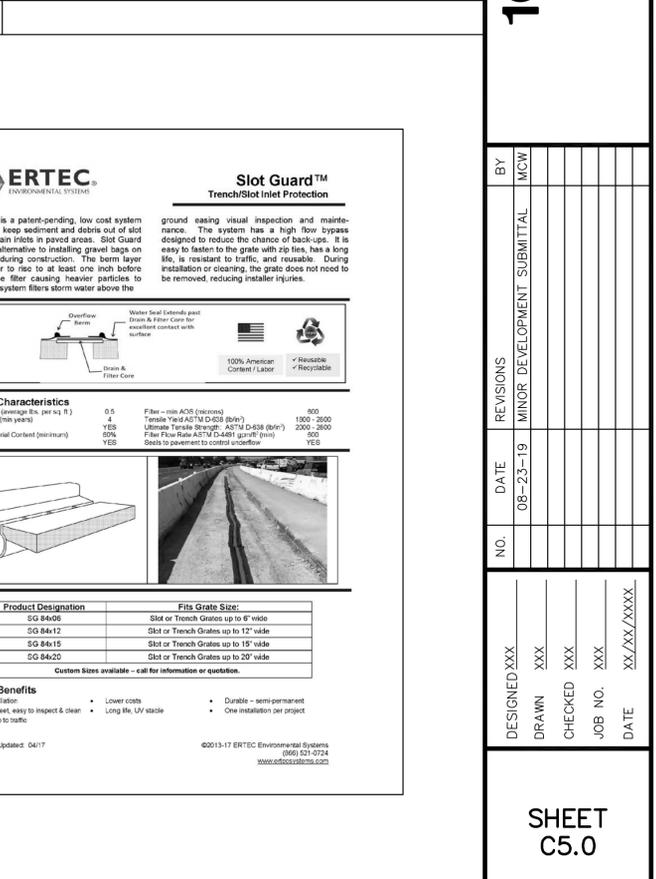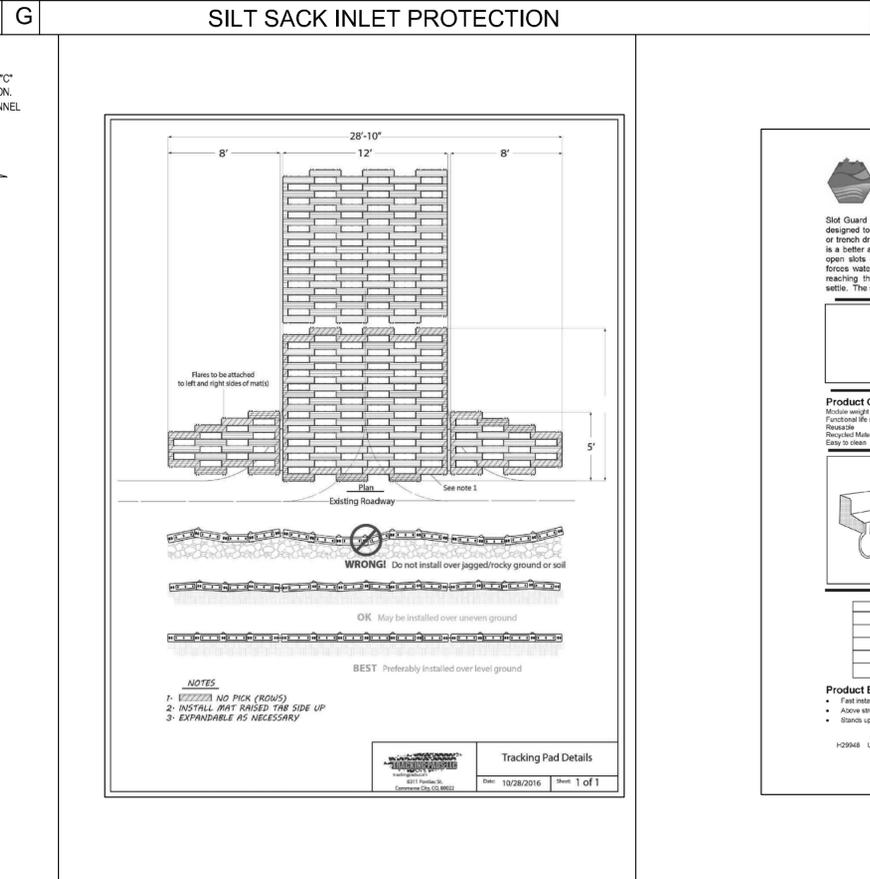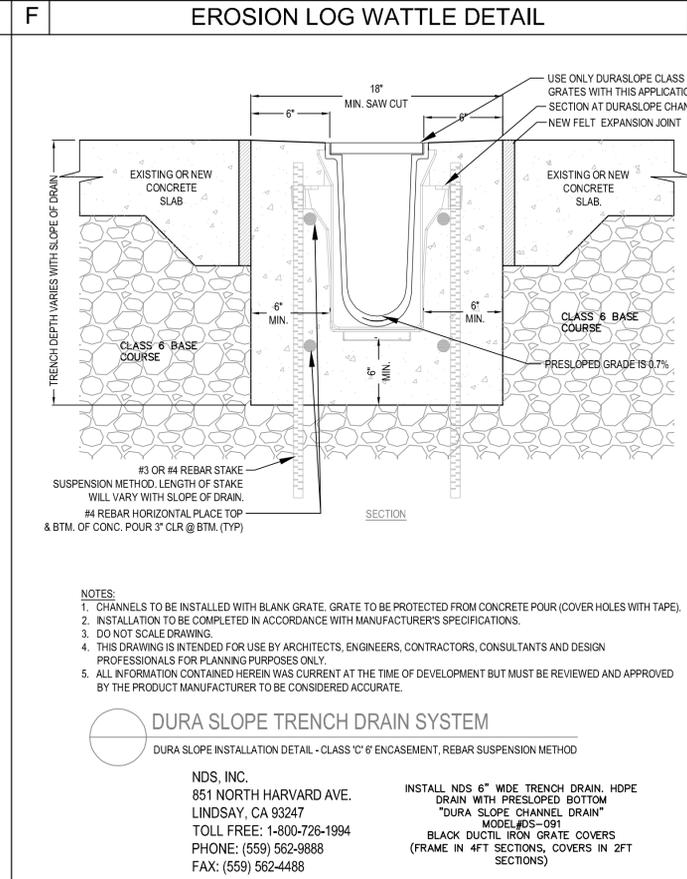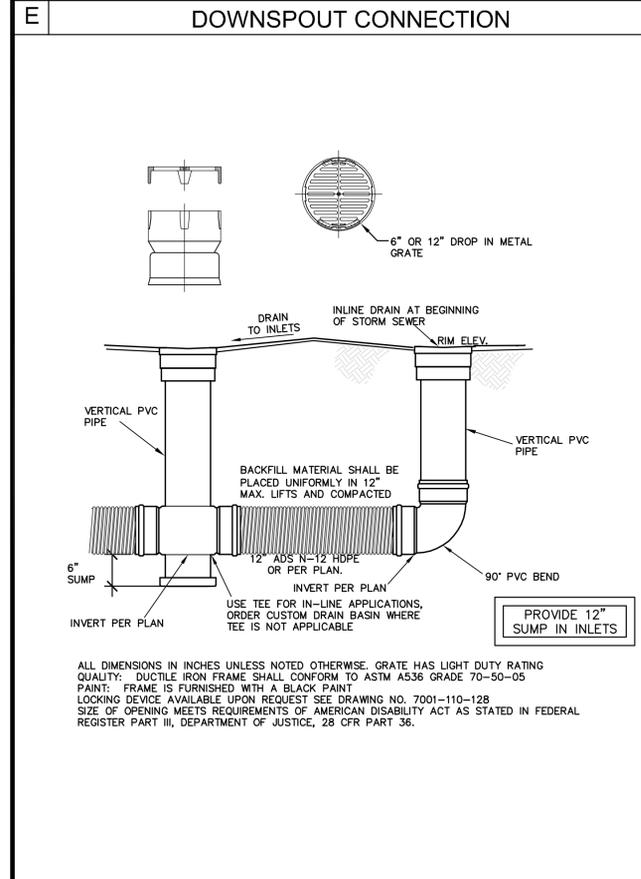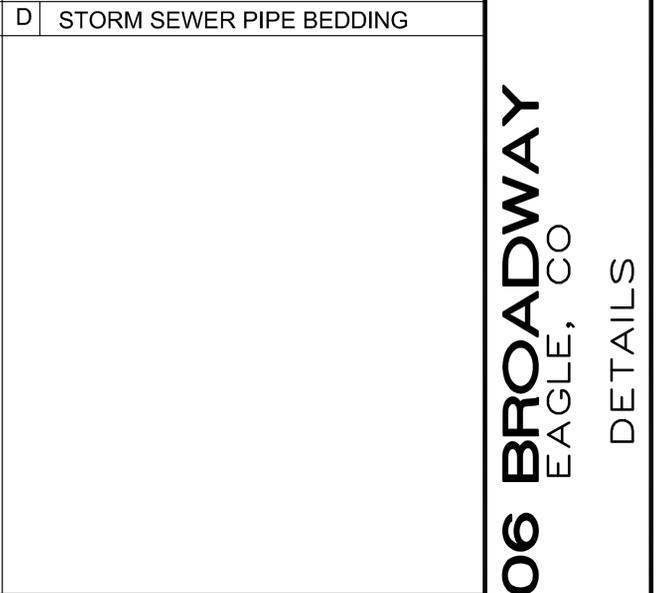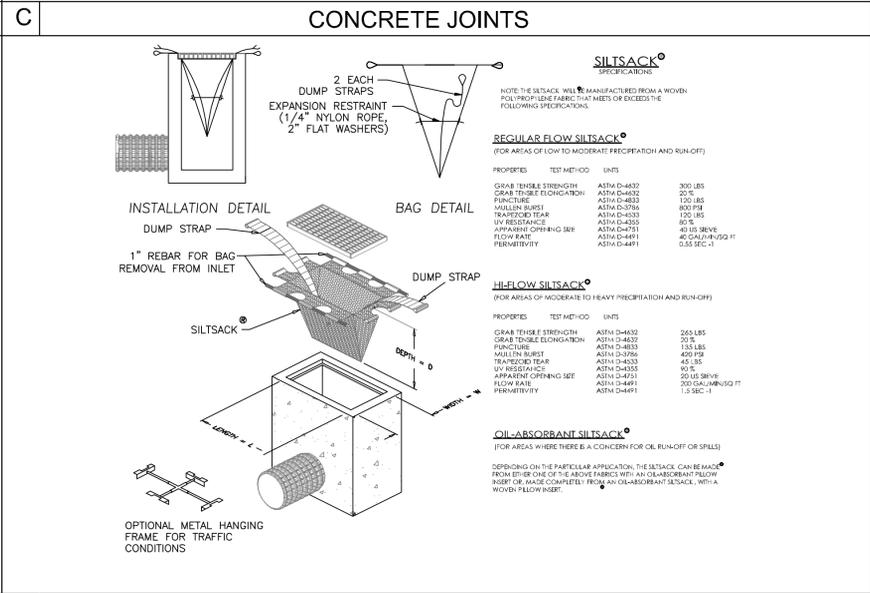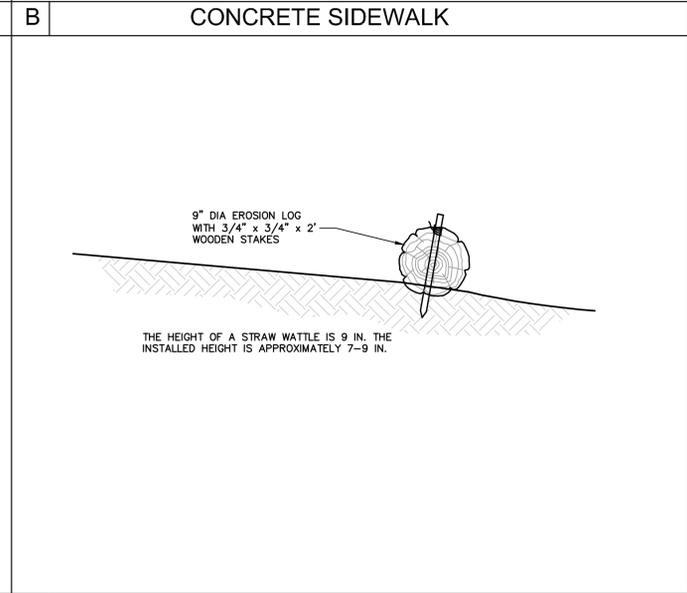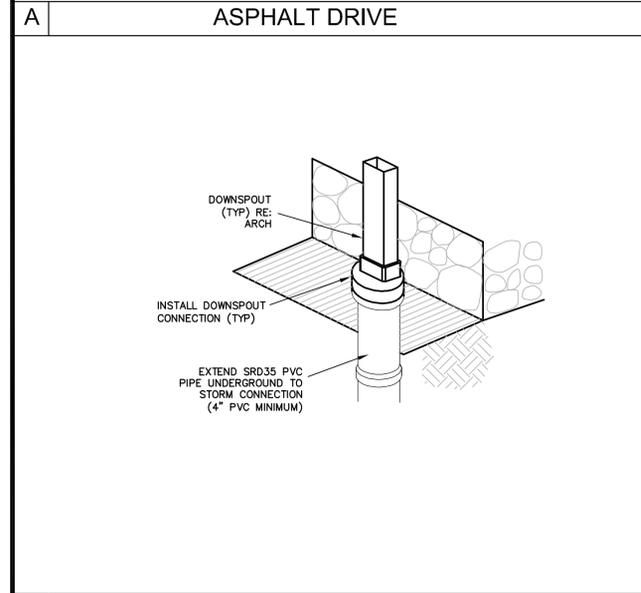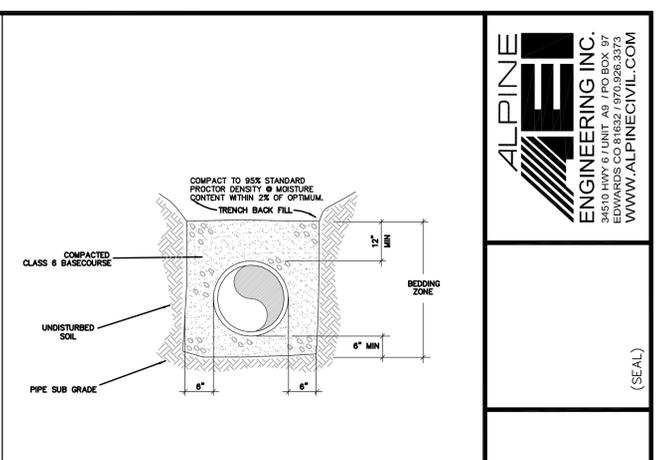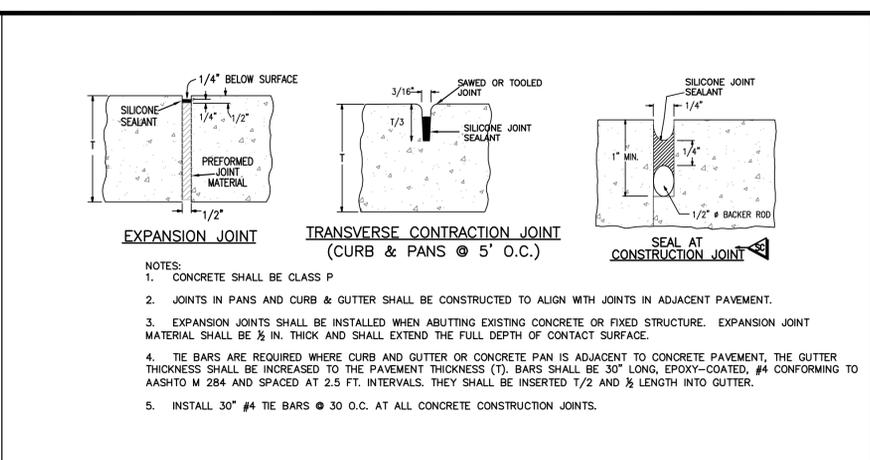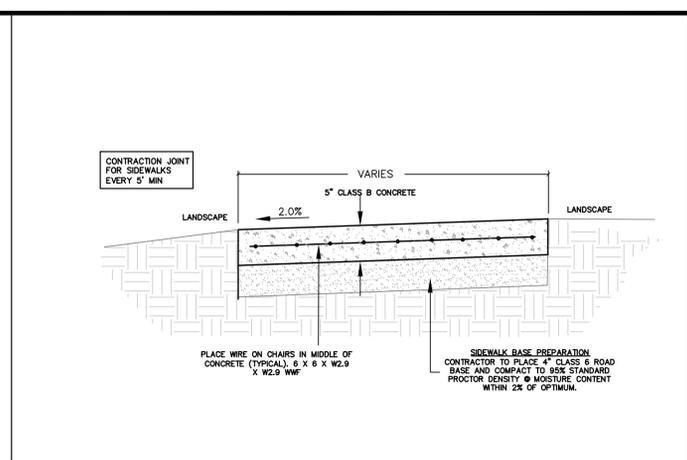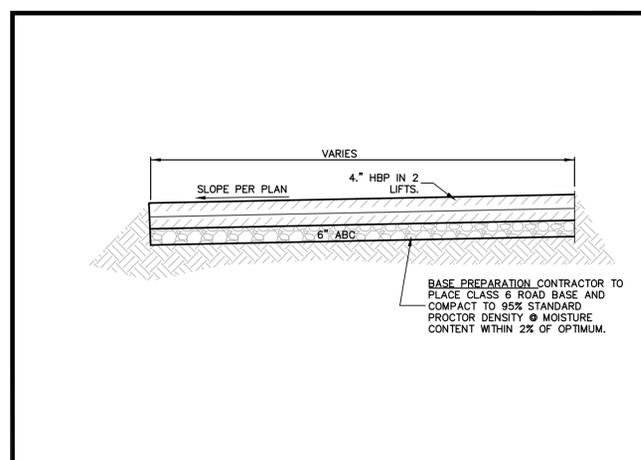


H NYLOPLAST AREA INLINE DRAINS

I TRENCH DRAIN

J TRACKING PAD


K ERTEC TRENCH DRAIN PROTECTION

C:\Eagle\106 Broadway - 2019\DWG\MasterDetails-106.dwg, 8/22/2019 11:51:21 AM, wendy

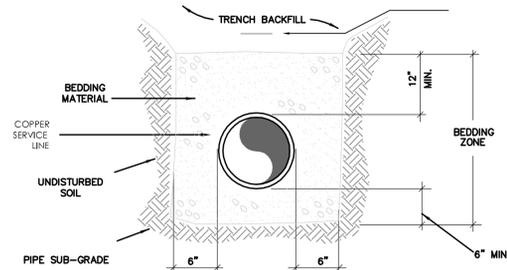

APPROVED CURB BOXES
 FOR CURB STOPS UP TO 1":
 MUELLER H10314 WITH 89982 LID WITH 1" SHAFT
 FOR CURB STOPS LARGER THAN 1":
 MUELLER H10336 WITH 89981 LID WITH 2" SHAFT
 ALL CURB STOPS LOCATED IN ASPHALT OR CONCRETE
 SHALL BE MUELLER H10334 WITH HEXAGONAL NUTS

SERVICE STUBOUT BEDDING

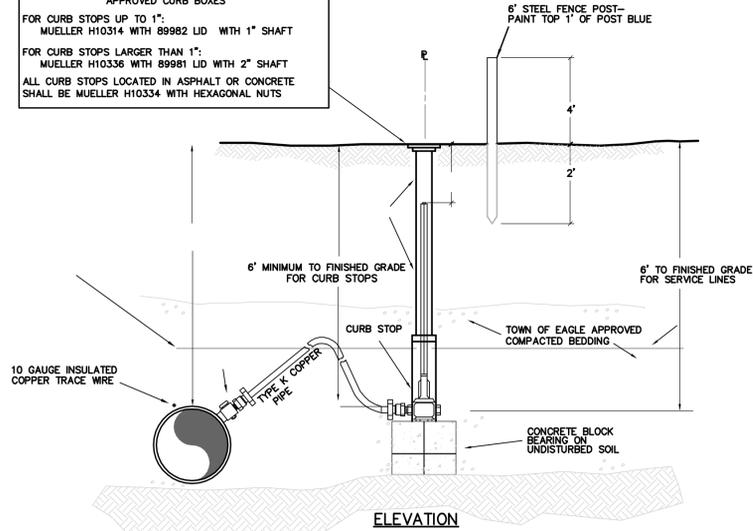


GENERAL NOTES


1. CURB STOP TO BE LOCATED AT THE PROPERTY LINE OR AT THE EDGE OF EASEMENT—WHICHEVER IS CLOSER TO THE MAIN.
2. SERVICE LINE CORP. STOP TO BE TAPPED ABOVE SPRING LINE OF WATER MAIN.

REFER TO LATEST TOWN OF
 EAGLE PW MANUAL (JAN 2018)
 FOR WATER AND SEWER
 STANDARDS AND SPECIFICATIONS

PLAN VIEW

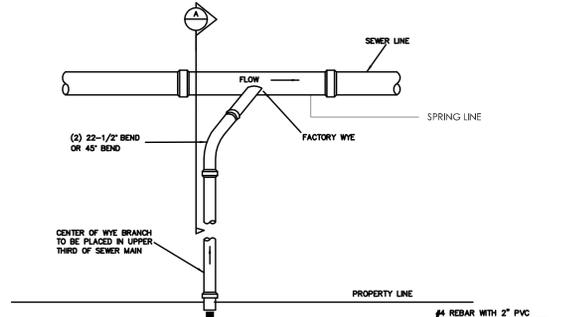


SECTIONAL VIEW

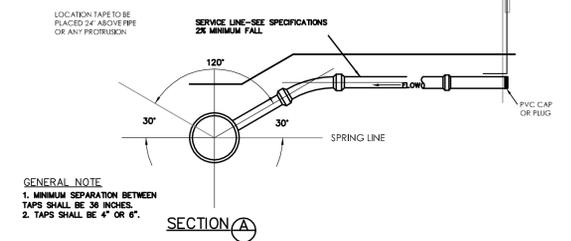

- GENERAL NOTE**
1. MINIMUM SEPARATION BETWEEN TAPS SHALL BE 36 INCHES.
 2. TAPS SHALL BE 4" OR 6".


IF THE DISTANCE TO THE TOP OF THE OPERATING NUT TO THE TOP OF THE VALVE COVER IS GREATER THAN 6MM, AN EXTENSION STEM WILL BE REQUIRED ON THE OPERATING NUT. THE EXTENSION MUST BE SECURED TO THE VALVE OPERATING NUT.

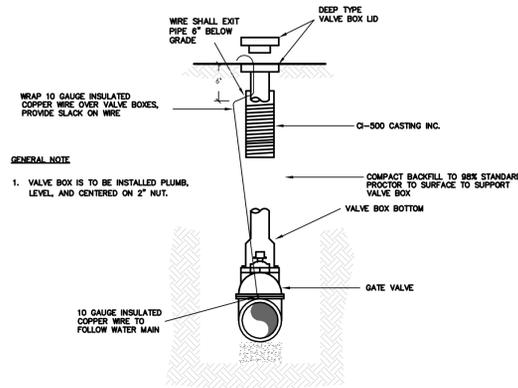

GENERAL NOTE

1. VALVE BOX IS TO BE INSTALLED PLUMB, LEVEL, AND CENTERED ON 2" NUT.


C GATE VALVE AND BOX ASSEMBLY

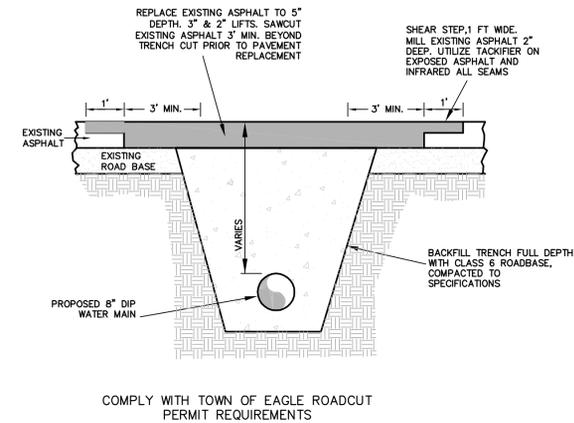

COMPLY WITH TOWN OF EAGLE ROAD CUT PERMIT REQUIREMENTS

D ROAD CUT DETAIL


CONTRACTOR MAY BE REQUIRED TO INSTALL SHALLOW UTILITIES BELOW STORM SEWER OR OTHER UTILITIES TO MAINTAIN MINIMUM 18\"/>

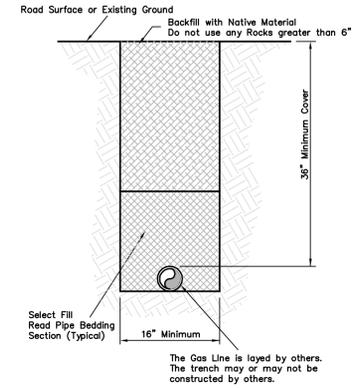

The Gas Line is Laid by others. The trench may or may not be constructed by others.

E GAS TRENCH

CONTRACTOR MAY BE REQUIRED TO INSTALL SHALLOW UTILITIES BELOW STORM SEWER OR OTHER UTILITIES TO MAINTAIN MINIMUM 18\"/>

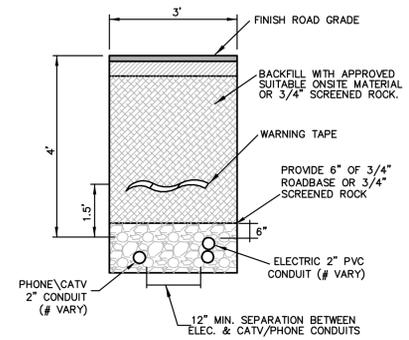

F ELEC./ PHONE/ JOINT TRENCH

DESIGNED/XXX	DATE	REVISIONS	BY
DRAWN XXX	08-23-19	MINOR DEVELOPMENT SUBMITTAL	MCW
CHECKED XXX			
JOB NO. XXX			
DATE XX/XX/XXXX			